

NRB 0800-3600 T

Air-water chiller

Cooling capacity 216,9 ÷ 1049,5 kW



- Microchannel coil
- HP floating: ESEER +7% with inverter fans
- Night mode



EUROVENT LCP

Outdoor chillers for the production of chilled water with high efficiency scroll compressors, axial fans, microchannel condenser coils, and Shell&tube heat exchanger. In the units (with desuperheater or total recovery) there is also the possibility of producing hot water for free. The base, the structure and the panels are made of steel treated with polyester paint.

VERSIONS

NRB_°	Standard
NRB_L	Standard low noise
NRB_A	High efficiency
NRB_E	High efficiency low noise
NRB_U	Very high efficiency
NRB_N	Very high efficiency low noise

RANGE OF OPERATION

Work up to 50°C of outdoor air temperature at full load, depending on size and version. For further details refer to the selection software/technical documentation.

- Unit with 2 refrigerant circuits designed to provide maximum efficiency at full load, also ensuring high efficiency at partial loads and ensuring continuity in case one of the circuits stops.
- The full range uses aluminium microchannel coils, ensuring very high levels of efficiency. This allows the use less refrigerant compared to traditional copper coils.
- The possibility of using the electronic thermostatic valve brings significant benefits, particular in when the refrigerant is working at partial loads to the benefit of energy efficiency of the unit. It is supplied as standard from size 1800÷3600 and is optional for all other sizes.
- Standard differential pressure switch
- Electrical heater for plate heat exchanger
- Possibility of integrated hydronic kit that encloses the main hydraulic components; it is available in different configurations with one or two pumps, with different static pressures available.

CONTROL

Microprocessor adjustment, complete with a 7" touch screen keyboard, which allows to navigate intuitively among the various screens, allowing

to modify the operating parameters and graphically view the progress of some variables in real time.

- The presence of a programmable timer allows setting time bands of operation and a possible second set-point.
- The temperature control takes place with the integral proportional logic, based on the water output temperature.
- **Floating HP:** is supplied as standard on all models. This modulates the fan speed according to the unit load and offers an improved ESEER (beyond the declared values) when applied with variable speed fans (ie. units with DCPX option or inverter fans). **ESEER improvements of up to 7% are obtained with inverter equipped models.**
- **Night Mode:** it is possible to set a silenced operation profile.
- Perfect for night operation, since it guarantees greater acoustic comfort in the evenings, and a high efficiency in the time of greater load. **Night Mode is standard on all low noise versions. For all other versions either the DCPX accessory or "J" inverter fan must be specified to allow Night Mode to operate.**

ACCESSORIES

AER485P1: RS-485 interface for supervision systems with MODBUS protocol.

AERNET: The device allows the control, the management and the remote monitoring of a Chiller with a PC, smartphone or tablet using Cloud connection. AERNET works as Master while every unit connected is configured as Slave (max. 6 unit); also, with a simple click is possible to save a log file with all the connected unit data in the personal terminal for post analysis.

PGD1: Remote control of the chiller operating functions.

MULTICHILLER_EVO: Control system for multiple parallel installed constant flow chillers providing individual chiller on/off and control capability.

DCPX: Device for condensation temperature control, with continuous speed modulation of fans by using a pressure transducer. **Standard in option low noise version or with desuperheater.**

FL: Flow Switch. **The accessory must be mounted or otherwise forfeit warranty**

AVX: Spring anti-vibration mounts.

ACCESSORIES FACTORY FITTED ONLY

DRE: Electronic soft starter which reduces starting current.
RIF: Power factor correction. Connected in parallel to the motor allowing about 10% reduction of input current).
KRS: Evaporator trace heating for Shell&tube

XLA: The Kit, which consists of resistances for the electric power board and "J" inverter fans, allows the outdoor air temperature operating range to be extended from -10°C to -20°C.

GP: Coil guards.

COMPATIBILITY WITH THE VMF SYSTEM: For further system information please refer to the specific documentation.

ACCESSORIES COMPATIBILITY

Model	vers.	0800	0900	1000	1100	1200	1400	1600	1800	2000	2200	2400	2600	2800	3000	3200	3400	3600
AER485P1	
AERNET	
PGD1	
MULTICHILLER_EVO	
DCPX	(1)
FL	
AVX	(1)

(1) Refer to the technical documentation

Device for peak current reduction

Vers.	0800	0900	1000	1100	1200	1400	1600	1800	2000	2200	2400	2600	2800	3000	3200	3400	3600
all	DRENRB0800	DRENRB0900	DRENRB1000	DRENRB1100	DRENRB1200	DRENRB1400	DRENRB1600	-	-	-	-	-	-	-	-	-	-

A grey background indicates the accessories assembled in the factory

Power factor correction

Vers.	0800	0900	1000	1100	1200	1400	1600	1800	2000	2200	2400	2600	2800	3000	3200	3400	3600
°	RIFO800	RIFO900	RIF1000	RIF1100	RIF1200	RIF1400	RIF1600	RIF1800	RIF2000	RIF2200	RIF2400	RIF2600	RIF2800	RIF3000	RIF3200	RIF3400	RIF3600
L	RIFO800	RIFO900	RIF1000	RIF1100	RIF1200	RIF1400	RIF1601	RIF1800	RIF2000	RIF2200	RIF2400	RIF2600	RIF2800	RIF3000	RIF3200	RIF3400	RIF3600
A	RIFO800	RIFO900	RIF1000	RIF1100	RIF1200	RIF1400	RIF1601	RIF1800	RIF2000	RIF2200	RIF2400	RIF2600	RIF2800	RIF3000	RIF3200	RIF3400	RIF3600
E	RIFO800	RIFO900	RIF1000	RIF1101	RIF1201	RIF1401	RIF1601	RIF1800	RIF2000	RIF2200	RIF2400	RIF2600	RIF2800	RIF3000	RIF3200	RIF3400	RIF3600
U	RIFO800	RIFO900	RIF1000	RIF1101	RIF1201	RIF1401	RIF1601	RIF1800	RIF2000	RIF2200	RIF2400	RIF2600	RIF2800	RIF3000	RIF3200	RIF3400	RIF3600
N	RIFO801	RIFO901	RIF1001	RIF1101	RIF1201	RIF1401	RIF1601	RIF1800	RIF2000	RIF2200	RIF2400	RIF2600	RIF2800	RIF3000	RIF3200	RIF3400	RIF3600

A grey background indicates the accessories assembled in the factory

KRS: Electric heater for the heat exchanger

Vers.	0800	0900	1000	1100	1200	1400	1600	1800	2000	2200	2400	2600	2800	3000	3200	3400	3600
all

Refer to the technical documentation

A grey background indicates the accessories assembled in the factory

GP: Anti-intrusion grid

Vers.	0800	0900	1000	1100	1200	1400	1600	1800	2000	2200	2400	2600	2800	3000	3200	3400	3600
all	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*

Refer to the technical documentation

A grey background indicates the accessories assembled in the factory

XLA: Kit for low temperature

Vers.	0800	0900	1000	1100	1200	1400	1600	1800	2000	2200	2400	2600	2800	3000	3200	3400	3600
°	-	-	-	-	-	-	-	*	*	*	*	*	*	*	*	*	*
L	-	-	-	-	-	-	*	*	*	*	*	*	*	*	*	*	*
A	-	-	-	-	-	-	*	*	*	*	*	*	*	*	*	*	*
E	-	-	-	*	*	*	*	*	*	*	*	*	*	*	*	*	*
U	-	-	-	*	*	*	*	*	*	*	*	*	*	*	*	*	*
N	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*

With the accessory XLA do not use the DCPX

A grey background indicates the accessories assembled in the factory

CONFIGURATOR

Field	Description
1,2,3	NRB
4,5,6,7	Sizes ⁽¹⁾ 0800-0900-1000-1100-1200-1400-1600-1800-2000-2200-2400-2600-2800-3000-3200-3400-3600
8	Operating field ◦ Standard (temperature of water produced up to +4 °C) ⁽²⁾ Y Low Temperature (temperature of water produced from +4°C a -8°C) ⁽³⁾ X Electronic Thermostatic Valve (temperature of water produced up to +4 °C) Z Low Temperature Electronic Thermostatic Valve (temperature of water produced from +4°C a -8°C) ⁽³⁾
9	Model ◦ Cooling Only C Motor Condensing Unit ⁽⁴⁾
10	Heat recovery ◦ Without Heat Recovery D With Desuperheater ⁽⁵⁾ T With Total Recovery ⁽⁶⁾
11	Version ◦ Standard L Low Noise Standard A High Efficiency E Low Noise High Efficiency U Very High Efficiency N Low noise very high efficiency
12	Coils ◦ Aluminium microchannel O Painted Aluminium Microchannel R Copper - copper S Copper - Tinned

(1) The availability of models is to be agreed with the Technical Sales

(2) Sizes from 1800÷3600 standard with the electronic thermostatic valve

(3) In the versions A-E-U-N it's possible produce cooling water up to -10°C, for more information contact us

(4) The motor condensing units are not configurable with option Y/X/Z. The models with total recovery "D/T" are not configurable with Y/Z and with vers. "C"

(5) The Desuperheater is compatible with all models even in pump versions.

(6) For compatibility with Total Recovery see table below. For compatibility with the Hydronic Kit, see the table below.

Field	Description
13	Fans ◦ Standard (standard for sizes up 0800 to 1800) M Increased J Inverter (standard for sizes up 2000 to 3600)
14	Power supply ◦ 400V/3/50Hz magnet circuit breakers
15-16	Integrated hydronic kit 00 Without hydronic kit With n°1 pump: ⁽⁵⁾ PA Pump A PB Pump B PC Pump C PD Pump D PE Pump E PF Pump F PG Pump G PH Pump H PI Pump I PJ Pump J
	With n°2 pump: ⁽⁵⁾ DA Pump A and Stand-by pump DB Pump B and Stand-by pump DC Pump C and Stand-by pump DD Pump D and Stand-by pump DE Pump E and Stand-by pump DF Pump F and Stand-by pump DG Pump G and Stand-by pump DH Pump H and Stand-by pump DI Pump I and Stand-by pump DJ Pump J and Stand-by pump

COMPATIBLE WITH TOTAL RECOVERY

Version	0800	0900	1000	1100	1200	1400	1600	1800	2000	2200	2400	2600	2800	3000	3200	3400	3600
Standard	◦	-	-	-	-	-	-	-	-	-	•	•	•	•	•	•	•
Silenced standard	L	-	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•
High efficiency	A	-	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•
Silenced high efficiency	E	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	•
Very high efficiency	U	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	•
Silenced very high efficiency	N	-	-	-	•	•	•	•	•	•	•	•	•	•	•	•	•

COMPATIBILITY OF MODELS WITH HYDRONIC UNITS AVAILABLE WITH A CONFIGURATOR

Version	0800	0900	1000	1100	1200	1400	1600	1800	2000	2200	2400	2600	2800	3000	3200	3400	3600
Standard	◦	-	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•
Silenced standard	L	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	•
High efficiency	A	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	•
Silenced high efficiency	E	-	-	-	•	•	•	•	•	•	•	•	•	•	•	•	•
Very high efficiency	U	-	-	-	•	•	•	•	•	•	•	•	•	•	•	•	•
Silenced very high efficiency	N	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

* = it is possible to install pumping units. Standard differential pressure switch. Water filter not supplied

PERFORMANCE SPECIFICATIONS

NRB - °

Size	0800	0900	1000	1100	1200	1400	1600	1800	2000*	2200*	2400*	2600*	2800*	3000*	3200*	3400*	3600*	
Cooling performance 12 °C / 7 °C(1)																		
Cooling capacity	kW	221,5	244,5	270,3	299,7	353,1	404,9	439,0	511,2	560,9	598,2	675,8	721,6	786,8	830,6	880,2	945,8	998,2
Input power	kW	73,3	83,1	94,1	110,3	117,5	135,4	155,1	175,7	194,0	216,6	236,5	256,0	270,3	292,6	314,7	329,4	355,2
Cooling total input current	A	128	143	160	186	202	230	261	300	330	367	405	434	459	498	535	563	606
EER	W/W	3,02	2,94	2,87	2,72	3,00	2,99	2,83	2,91	2,89	2,76	2,86	2,82	2,91	2,84	2,80	2,87	2,81
Water flow	l/h	38117	42076	46497	51565	60733	69640	75511	87913	96469	102882	116222	124099	135304	142812	151332	162608	171610
Pressure drops	kPa	46	55	38	45	44	39	46	40	47	53	52	58	60	36	39	46	43

* Units with Inverter fans

(1) Data 14511:2018; System side water heat exchanger 12 °C/7 °C; External air 35 °C

NRB - L

Size	0800	0900	1000	1100	1200	1400	1600	1800	2000	2200	2400	2600	2800	3000	3200	3400	3600	
Cooling performance 12 °C / 7 °C(1)																		
Cooling capacity	kW	216,9	237,7	272,7	307,7	343,9	391,0	438,4	498,2	555,4	608,2	666,2	727,2	770,0	834,2	886,6	952,6	1004,1
Input power	kW	73,0	85,9	92,0	107,4	122,7	139,0	151,9	173,3	191,6	213,6	233,8	246,8	270,1	284,5	307,5	323,1	347,9
Cooling total input current	A	123	142	154	179	203	232	251	290	319	359	390	413	449	479	513	545	585
EER	W/W	2,97	2,77	2,97	2,87	2,80	2,81	2,89	2,87	2,90	2,85	2,85	2,95	2,85	2,93	2,88	2,95	2,89
Water flow	l/h	37323	40890	46905	52926	59137	67243	75380	85669	95497	104585	114564	125029	132382	143407	152424	163776	172631
Pressure drops	kPa	25	20	27	24	29	23	30	28	37	36	44	28	31	30	34	39	43

(1) Data 14511:2018; System side water heat exchanger 12 °C/7 °C; External air 35 °C

NRB - A

Size	0800	0900	1000	1100	1200	1400	1600	1800	2000	2200	2400	2600	2800	3000	3200	3400	3600	
Cooling performance 12 °C / 7 °C(1)																		
Cooling capacity	kW	224,1	252,2	283,7	326,1	361,2	411,7	462,2	519,2	576,0	633,3	697,6	757,5	805,8	867,0	928,7	980,8	1026,8
Input power	kW	70,6	80,9	90,2	104,7	115,3	131,8	147,6	166,3	183,5	203,1	223,3	240,5	256,5	277,0	297,0	314,4	330,3
Cooling total input current	A	124	140	159	182	198	224	252	284	316	349	386	418	442	476	513	542	568
EER	W/W	3,17	3,12	3,15	3,12	3,13	3,12	3,13	3,12	3,14	3,12	3,12	3,15	3,14	3,13	3,13	3,12	3,11
Water flow	l/h	38560	43394	48801	56076	62118	70789	79487	89271	99047	108893	119965	130235	138536	149047	159671	168621	176531
Pressure drops	kPa	27	22	30	27	32	25	34	30	39	39	48	30	34	32	38	41	45

(1) Data 14511:2018; System side water heat exchanger 12 °C/7 °C; External air 35 °C

NRB - E

Size	0800	0900	1000	1100	1200	1400	1600	1800	2000	2200	2400	2600	2800	3000	3200	3400	3600	
Cooling performance 12 °C / 7 °C(1)																		
Cooling capacity	kW	219,2	248,3	275,0	321,4	358,7	403,2	455,0	514,5	569,0	637,2	688,3	741,1	794,3	857,9	911,7	965,1	1019,4
Input power	kW	69,6	79,4	88,5	102,2	114,9	129,8	144,5	164,7	183,0	203,4	221,4	236,5	255,5	274,7	290,6	310,5	327,8
Cooling total input current	A	119	135	149	172	193	216	240	275	306	343	373	397	426	460	488	521	549
EER	W/W	3,15	3,13	3,11	3,15	3,12	3,11	3,15	3,12	3,11	3,13	3,11	3,13	3,11	3,12	3,14	3,11	3,11
Water flow	l/h	37709	42725	47302	55271	61679	69338	78240	88465	97840	109549	118323	127416	136570	147496	156743	165934	175268
Pressure drops	kPa	19	23	20	27	21	27	26	33	33	22	25	30	34	33	38	41	46

(1) Data 14511:2018; System side water heat exchanger 12 °C/7 °C; External air 35 °C

NRB - U

Size	0800	0900	1000	1100	1200	1400	1600	1800	2000	2200	2400	2600	2800	3000	3200	3400	3600	
Cooling performance 12 °C / 7 °C(1)																		
Cooling capacity	kW	227,6	257,6	286,5	329,6	369,8	414,7	466,9	529,2	594,0	655,1	716,9	765,5	815,3	879,0	940,9	999,7	1049,5
Input power	kW	68,8	77,7	86,8	99,5	111,7	126,1	140,9	159,5	179,0	197,8	215,3	229,4	248,9	265,7	282,3	302,5	319,5
Cooling total input current	A	124	138	153	176	196	218	244	278	312	348	377	401	432	463	494	528	556
EER	W/W	3,31	3,31	3,30	3,31	3,31	3,29	3,32	3,31	3,32	3,31	3,33	3,34	3,28	3,31	3,33	3,30	3,28
Water flow	l/h	39150	44308	49293	56689	63595	71301	80285	91002	102137	112618	123250	131615	140178	151126	161768	171875	180442
Pressure drops	kPa	20	25	21	29	23	28	27	35	36	23	27	32	36	35	40	44	49

(1) Data 14511:2018; System side water heat exchanger 12 °C/7 °C; External air 35 °C

NRB - N

Size	0800	0900	1000	1100	1200	1400	1600	1800	2000	2200	2400	2600	2800	3000	3200	3400	3600	
Cooling performance 12 °C / 7 °C(1)																		
Cooling capacity	kW	227,7	260,4	284,7	327,7	367,7	412,3	466,1	521,6	579,1	645,7	702,6	749,4	804,7	866,4	926,7	973,5	1029,9
Input power	kW	68,5	78,9	86,4	98,5	111,9	125,4	140,4	157,8	176,0	194,6	212,9	229,0	246,7	263,5	282,7	301,1	319,3
Cooling total input current	A	118	135	147	167	189	209	234	264	295	329	360	385	412	442	475	506	536
EER	W/W	3,32	3,30	3,30	3,33	3,29	3,29	3,32	3,31	3,29	3,32	3,30	3,27	3,26	3,29	3,28	3,23	3,23
Water flow	l/h	39166	44791	48971	56365	63233	70905	80150	89691	99568	111008	120788	128848	138355	148960	159327	167376	177077
Pressure drops	kPa	20	25	2														

ENERGY DATA

Size	Version	0800	0900	1000	1100	1200	1400	1600	1800	2000*	2200*	2400*	2600*	2800*	3000*	3200*	3400*	3600*
Cooling capacity with low leaving water temp (UE n° 2016/2281)																		
SEER	° W/W	4,09	4,00	3,98	3,89	4,22	4,25	4,13	4,12	4,17	4,11	4,14	4,14	4,23	4,16	4,13	4,19	4,12
	L W/W	4,13	3,94	4,15	4,12	4,15	4,15	4,27	4,17	4,14	4,12	4,12	4,28	4,14	4,19	4,18	4,18	4,16
	A W/W	4,28	4,17	4,27	4,28	4,36	4,37	4,43	4,30	4,25	4,20	4,26	4,37	4,29	4,27	4,27	4,22	4,20
	E W/W	4,30	4,20	4,26	4,35	4,40	4,35	4,51	4,33	4,23	4,30	4,31	4,38	4,28	4,30	4,34	4,25	4,28
	U W/W	4,35	4,35	4,38	4,47	4,51	4,50	4,58	4,51	4,42	4,42	4,47	4,56	4,36	4,40	4,47	4,35	4,36
	N W/W	4,44	4,38	4,44	4,55	4,54	4,56	4,65	4,54	4,43	4,47	4,49	4,49	4,40	4,44	4,43	4,33	4,35
ηsc	° %	160,5	156,9	156,0	152,7	165,7	167,1	162,0	161,9	163,7	161,2	162,5	162,7	166,0	163,2	162,1	164,7	161,8
	L %	4,13	3,94	4,15	4,12	4,15	4,15	4,27	4,17	4,14	4,12	4,12	4,28	4,14	4,19	4,18	4,18	4,16
	A %	168,3	163,6	167,6	168,3	171,5	165,9	174,0	168,8	167,0	165,1	167,4	171,6	168,7	167,8	167,9	165,9	164,9
	E %	168,8	165,0	167,4	170,9	173,1	167,0	177,2	170,0	166,2	168,9	169,5	172,2	168,0	168,8	170,4	167,0	168,2
	U %	171,0	170,8	172,1	175,8	177,5	171,0	180,1	177,2	173,7	173,6	175,9	179,2	171,5	173,0	175,6	171,0	171,4
	N %	174,6	172,2	174,4	178,8	178,6	170,1	182,9	178,4	174,0	175,9	176,4	176,7	172,9	174,4	174,3	170,1	170,9

* Version ° = Units with Inverter fans

ELECTRIC DATA

Size	Version	0800	0900	1000	1100	1200	1400	1600	1800	2000*	2200*	2400*	2600*	2800*	3000*	3200*	3400*	3600*
Electric data (1)																		
Maximum current (FLA)	° A	164	181	197	226	262	291	320	367	408	449	497	529	569	610	650	698	739
	L A	177	193	222	252	281	310	352	393	446	487	547	592	625	666	720	761	802
	A A	177	193	222	252	281	310	352	393	446	487	547	592	625	666	720	761	802
	E A	190	206	222	265	294	323	365	424	465	519	560	605	638	692	745	786	827
	U A	190	206	222	265	294	323	365	424	465	519	560	605	638	692	745	786	827
	N A	203	219	235	277	307	336	383	437	478	531	572	618	651	704	758	799	840
Peak current (LRA)	° A	353	408	424	477	513	625	654	637	678	719	766	799	838	879	920	967	1008
	L A	366	421	450	503	532	644	686	662	716	757	816	862	895	936	989	1030	1071
	A A	366	421	450	503	532	644	686	662	716	757	816	862	895	936	989	1030	1071
	E A	378	434	450	515	545	657	699	693	734	788	829	874	907	961	1015	1056	1096
	U A	378	434	450	515	545	657	699	693	734	788	829	874	907	961	1015	1056	1096
	N A	391	446	463	528	557	670	717	706	747	801	842	887	920	974	1027	1068	1109

* Version ° = Units with Inverter fans

(1) Unit standard configuration without hydronic kit

GENERAL TECHNICAL DATA


Size	Version	0800	0900	1000	1100	1200	1400	1600	1800	2000*	2200*	2400*	2600*	2800*	3000*	3200*	3400*	3600*	
Compressor																			
Compressor	Type	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll												
Compressor / Circuit	n°	4/2	4/2	4/2	4/2	4/2	4/2	4/2	4/2	4/2	4/2	4/2	4/2	5/2	6/2	6/2	6/2	6/2	
Refrigerant	Type												R410A						
System side heat exchanger																			
Heat exchanger	Type												Shell&Tube						
Heat exchanger	n°												1						
Hydraulic connections (in/out)	Ø												Plese refer to technical documentation						
Fans																			
Fans	Type	Axial	Axial	Axial	Axial	Axial	Axial												
Fans	°	4	4	4	4	6	6	6	8	8*	8*	10*	10*	12*	12*	12*	14*	14*	
Air flow rate	m³/h	64000	64000	64000	64000	96000	96000	128000	128000	128000	160000	160000	192000	192000	192000	224000	224000	224000	
Fans	°	4	4	6	6	6	6	8	8	10	10	12	14	14	14	16	16	16	
Air flow rate	m³/h	46000	46000	69000	69000	69000	69000	92000	92000	115000	115000	138000	161000	161000	161000	184000	184000	208000	
Fans	°	4	4	6	6	6	6	8	8	10	10	12	14	14	14	16	16	16	
Air flow rate	m³/h	64000	64000	96000	96000	128000	128000	128000	128000	160000	160000	192000	192000	192000	224000	224000	224000	256000	256000
Fans	°	6	6	6	8	8	8	10	12	12	14	14	14	16	16	18	20	20	
Air flow rate	m³/h	69000	69000	69000	92000	92000	92000	115000	115000	138000	161000	161000	184000	184000	207000	224000	224000	230000	230000
Fans	°	6	6	6	8	8	8	10	12	12	14	14	14	16	16	18	20	20	
Air flow rate	m³/h	96000	96000	96000	128000	128000	128000	160000	192000	192000	224000	224000	256000	256000	288000	320000	320000	320000	320000
Fans	°	8	8	8	10	10	10	12	14	14	16	16	18	18	20	22	22	22	
Air flow rate	m³/h	92000	92000	92000	115000	115000	115000	138000	161000	161000	184000	184000	207000	207000	230000	253000	253000	253000	253000
Sound data (1)																			
Sound power level	°	dB(A)	88	88	88	88	90	90	90	92	92	93	95	95	96	96	96	96	
Sound power level	L	dB(A)	83	83	85	85	86	86	88	89	90	90	91	91	92	92	93	93	
Sound power level	A	dB(A)	88	88	90	90	90	91	91	92	94	94	96	96	96	97	97	97	
Sound power level	E	dB(A)	85	85	85	86	86	88	89	89	91	91	92	92	93	93	93	93	
Sound power level	U	dB(A)	90	90	90	91	91	91	93	94	95	96	96	97	97	98	98	98	
Sound power level	N	dB(A)	86	86	86	88	88	88	90	90	91	92	93	93	94	94	94	94	

* Version ° = Units with Inverter fans


(1) Sound power calculated on the basis of measurements made in accordance with UNI EN ISO 9614-2, as required for Eurovent certification.

DIMENSIONS


NRB0800÷1100 °
NRB0800÷0900 L/A



NRB1200÷1600 °
NRB1000÷1400 L/A
NRB0800÷1000 E/U

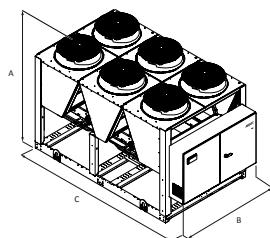

NRB1800÷3600 °
NRB1600÷3600 L/A
NRB1100÷3600 E/U
NRB0800÷3600 N

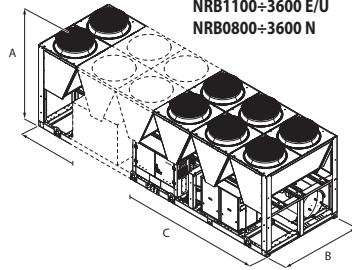

Size	Version	0800	0900	1000	1100	1200	1400	1600	1800	2000	2200	2400	2600	2800	3000	3200	3400	3600
Dimensions																		
A	all	mm	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450
B	all	mm	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200
	°	mm	2780	2780	2780	2780	3970	3970	3970	4760	4760	4760	5950	5950	7140	7140	8330	8330
	L	mm	2780	2780	3970	3970	3970	3970	4760	4760	5950	5950	7140	8330	8330	8330	9520	9520
C	A	mm	2780	2780	3970	3970	3970	3970	4760	4760	5950	5950	7140	8330	8330	8330	9520	9520
	E	mm	3970	3970	3970	4760	4760	4760	5950	7140	7140	8330	8330	9520	9520	10710	11900	11900
	U	mm	3970	3970	3970	4760	4760	4760	5950	7140	7140	8330	8330	9520	9520	10710	11900	11900
	N	mm	4760	4760	4760	5950	5950	5950	7140	8330	8330	9520	9520	10710	10710	11900	13090	13090

Aermec reserves the right to make any modifications deemed necessary.
All data is subject to change without notice. Aermec does not assume responsibility or liability for errors or omissions.

Aermec S.p.A.
Via Roma, 996 - 37040 Bevilacqua (VR) - Italia
Tel. 0442633111 - Telefax 044293577
www.aermec.com